



AGRI SAV
MACCHINE AGRICOLE

Via delle Concerie, 1
12038 - Savigliano (CN)
Tel: 0172 21847 - Fax: 0172 21847
E-mail: info@agrisav.it


www.agrisav.it



BUSHCUTTERS

D.A.S. SERIES 3 R

TECHNICAL DATA

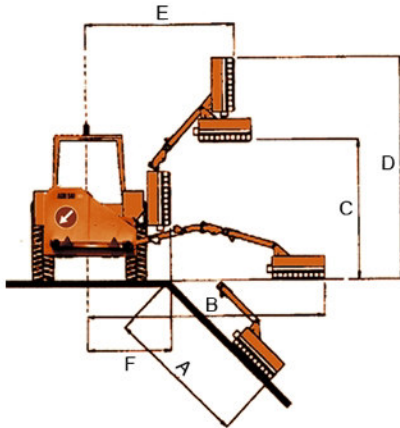

| Model: | DAS 500/3R | DAS 550/3R | DAS 600/3R |
|---------------------------|------------|------------|------------|
| Maximum extension (mm): | 5200 | 5700 | 6300 |
| Weight (Kg): | 950 | 1000 | 1050 |
| Oil reservoir (L): | 210 | 210 | 210 |
| Rotor (Rpm): | 3000 | 3000 | 3000 |
| P.d.f. (Rpm): | 540 | 540 | 540 |
| Head angle: | 190° | 190° | 190° |
| Headboard available (mm): | 1000/1200 | 1000/1200 | 1000/1200 |
| Power required (Hp): | 80/100 | 90/110 | 100/130 |
| Measure A (mm): | 4050 | 4550 | 5050 |
| Measure B (mm): | 5250 | 5750 | 6250 |
| Measure C (mm): | 2850 | 3250 | 3650 |
| Measure D (mm): | 5450 | 5850 | 6350 |
| Measure E (mm): | 1050 | 1150 | 1250 |
| Measure F (mm): | 1300 | 1300 | 1300 |

Standard equipment:

- Universal three point hitch
- Controls with cable mm 2500
- Reversible cutter hydraulic motor 55 HP
- Cutting rotation inverter
- Floating system (selflevelling the ground)
- Hydraulic rotation of safety
- Roller adjustable in height
- Adjustable front protection
- Rear protection
- Direct transmission
- Oil cooler
- Oleo gear on the first arm

Accessories:

- Electrical panel commands
- Electric controls with joystick
- Electric remote control
- PTO shaft
- Hydraulic swivel head
- Mechanical swivel head
- The telescopic arm on the first arm
- The telescopic arm on second arm
- Hydraulic safety on second arm
- Transmission with belt
- Cutter bar
- Navigation bar
- Fixing the tractor pullers

